


649.00 EUR  
incl. 19% VAT, plus [shipping](#)

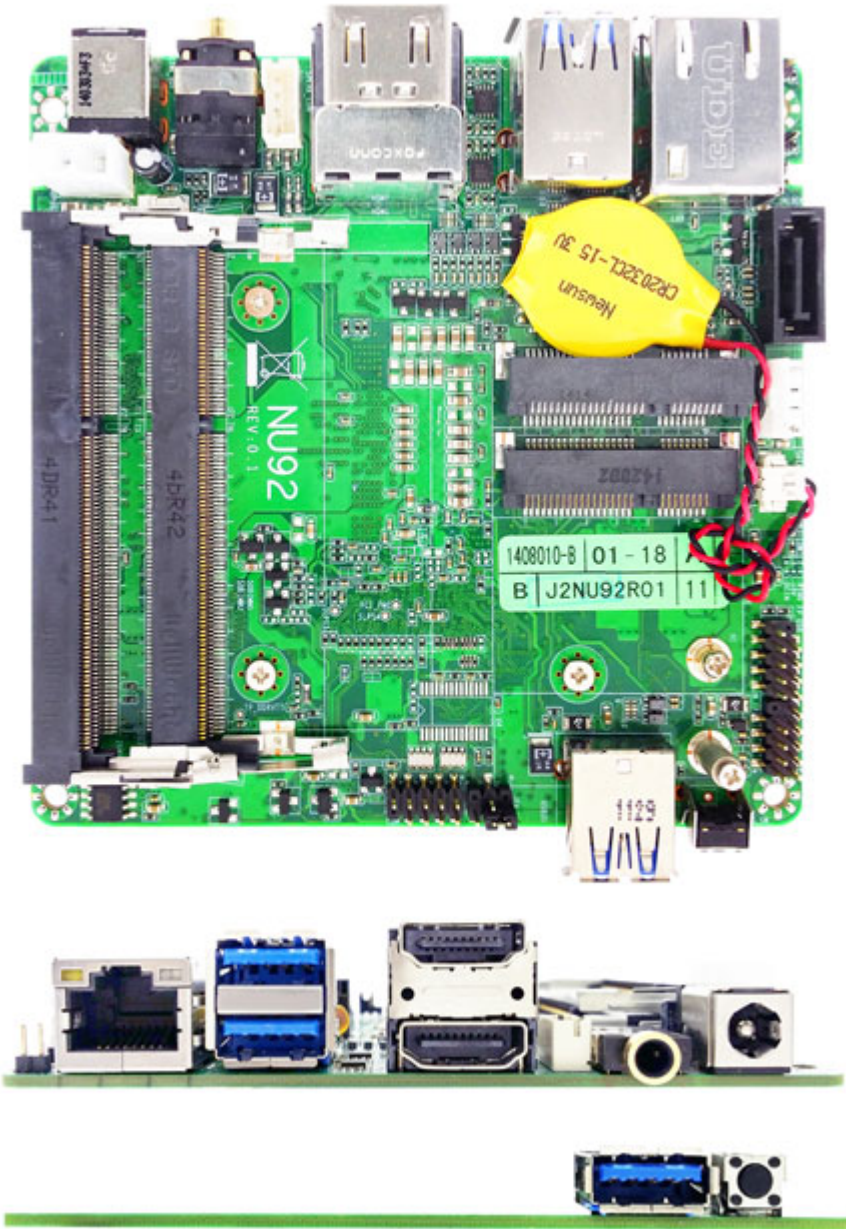

- INTEL® Haswell-U / Broadwell-U SoC Processor
- Support 2 \* SO-DIMM DDR3L 1333/1600 up to 16 GB
- 9~24V Wide range DC-in
- Support INTEL® i218LM Gigabit PHY LAN
- Onboard 1\* Half size Mini PCIe socket
- Onboard 1\*mSATA socket
- 3 \* USB3.0, 2 \* USB2.0
- 2 \* HDMI1.4 ports
- Support slim Fan design
- NUC Form Factor(101 \* 101mm)

<b>Form Factor</b>	
Dimensions	NUC (101 X 101 mm)
<b>Processor System</b>	
CPU	Intel® Haswell-U / Broadwell-U SoC Processor
Core Number	(By CPU)
Max Speed	(By CPU)
L2 Cache	(By CPU)

Chipset	- SoC
BIOS	- AMI 128Mb Flash ROM
<b>Expansion Slot</b>	
PCI	- 0
Mini-PCIe	- 1 (half size)
mSATA	- 1 (full size)
PCIe	- 0
CFast Card Socket	- 0
CF Card Socket	- 0
<b>Memory</b>	
Technology	- Two Channel DDR3L 1333/1066 MHz SDRAM
Max.	- 16 GB
Socket	- 2 * SO-DIMM
<b>Graphics</b>	
Controller	- Integrated Intel® HD Graphics
VRAM	- Shared Memory
VGA	- No
LVDS	- No
HDMI	- 2
DVI-I	- No
DisplayPort	- No
MultiDisplay	- Yes (Dual Display)
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: INTEL® 218LM
Connector	- 1 x RJ 45
<b>SATA</b>	
Max Data Transfer Rate	- 1 x SATAIII (6.0Gb/s)
<b>External I/O</b>	
VGA	- 0
DVI-I	- 0
HDMI	- 2
DisplayPort	- 0
Ethernet	- 1
USB	- 3 (2 x USB 3.0 at rear & 1 x USB3.0 at front)
Audio	- 1 (Line-out W/SPDIF-out)
Serial	- 0
eSATA	- 0
PS2	- 0
DC-input	- +9~24V DC in Jack
<b>Internal Connector</b>	
USB	- 2 (2 x USB 2.0)
PS/2	- 0
LVDS / inverter	- 0
VGA	- 0
Serial	- 1 (1 x RS232/422/485)
SATA	- 1
mPCIe	- 1 (half size)
Parallel	- 0
mSATA	- 1 (full size)
CIR	- 0
GPIO 8-bit	- 0
Chassis intrusion	- 1
Audio Amplifier Header	- 1
AT mode jumper	- 1

<b>Watchdog Timer</b>	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
<b>Power Requirements</b>	
Input PWR	- 9~24V DC-In - 2-pin PWR Con
Power On	- AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	- CE, FCC, RoHS, REACH
<b>Environment</b>	
Temperature	- Operating: 0■- 60■
	- Storage: -20■- 85■